


# DATA SHEET

## COMPONENT CABINET - TYPE 800

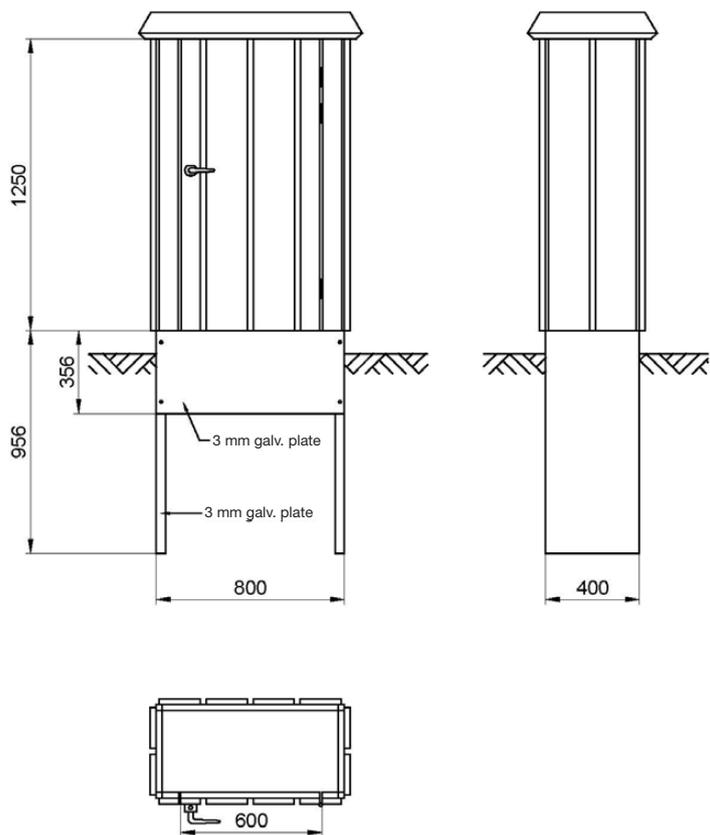

### DESCRIPTION

Component cabinets are constructed on a frame of square tubes which are then clad with profiled Aluzinc sheets. The component cabinet is supplied ready to use with a padlock and can be customized according to the client's wishes.

### MATERIALS

Frame: Sq.tube frame 25x25x2 mm.  
 Sides: Aluzinc sheet, 1.25 mm.  
 Roof: Aluzinc sheet, 1.25 mm.  
 Foundation: Plate 3 mm.  
 FU moisture barrier: Plate 3 mm.

### COLOUR

Is supplied painted, using textured URKI-TEXT paint (standard) in the color of your choice from the RAL color chart.

### STANDARD SURFACE TREATMENT

Frame, foundation and FU protection: Hot dip galvanized zinc as per DS/ EN 1461  
 Sides and roof: Aluzinc sheets as per DS/EN 10364  
 Exterior cabinet paint: C4-H as per DS/EN 12944.

### OPTIONS


Painting of cabinet exterior: C5-H as per DS/EN 12944  
 Foundation painted to IM3 as per DS/EN12944.

### COMPONENT CABINET - TYPE 800

TYPE	ITEM NO.	DESCRIPTION	EXTERIOR DIMENSIONS MM			INTERIOR DIMENSIONS MM			ASSEMBLY PLATE	
			W	D	H	W	D	H	W	H
800	64120030-1	CABINET	850	450	1400	750	325	1200		
	64190408	FOUNDATION	795	395						
		DOOR OPENING	560		1150				750	1200

## DATA SHEET

## COMPONENT CABINET - TYPE 1200

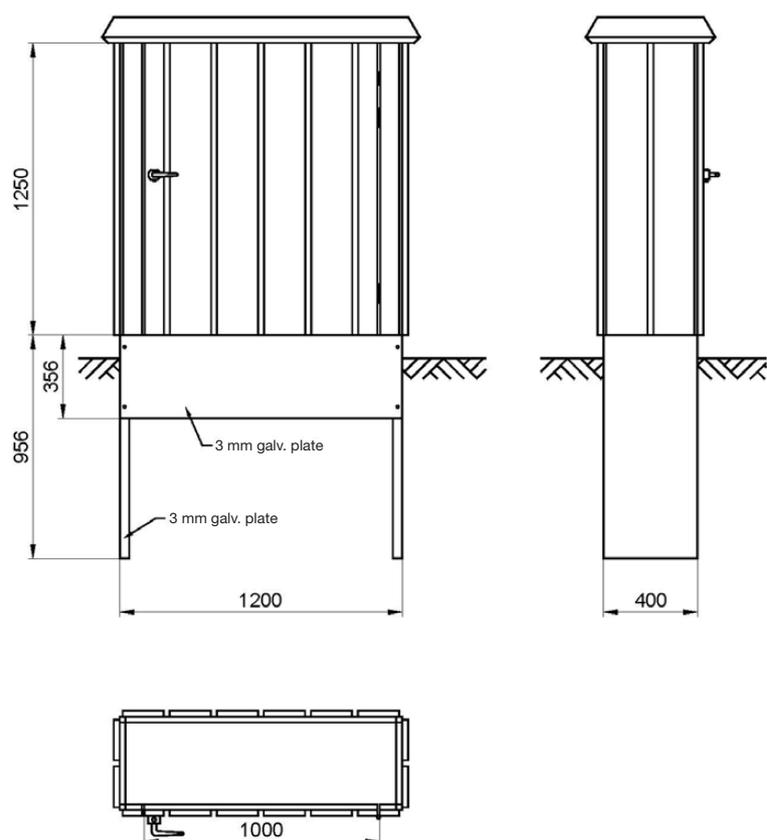**DESCRIPTION**

Component cabinets are constructed on a frame of square tubes which are then clad with profiled Aluzinc sheets. The component cabinet is supplied ready to use with a padlock and can be customized according to the client's wishes.

**MATERIALS**

Frame: Sq.tube frame 25x25x2 mm.  
Sides: Aluzinc sheet, 1.25 mm.  
Roof: Aluzinc sheet, 1.25 mm.  
Foundation: Plate 3 mm.  
FU moisture barrier: Plate 3 mm.

**COLOUR**

Is supplied painted, using textured URKI-TEXT paint (standard) in the color of your choice from the RAL color chart.

**STANDARD SURFACE TREATMENT**

Frame, foundation and FU protection: Hot dip galvanized zinc as per DS/ EN 1461  
Sides and roof: Aluzinc sheets as per DS/EN 10364  
Exterior cabinet paint: C4-H as per DS/EN 12944.

**OPTIONS**

Painting of cabinet exterior: C5-H as per DS/EN 12944  
Foundation painted to IM3 as per DS/EN12944.


**COMPONENT CABINET - TYPE 1200**

TYPE	ITEM NO.	DESCRIPTION	EXTERIOR DIMENSIONS MM			INTERIOR DIMENSIONS MM			ASSEMBLY PLATE	
			W	D	H	W	D	H	W	H
1200	64190412-1	CABINET	1250	450	1400	1150	325	1200		
	64190412	FOUNDATION	1195	395						
		DOOR OPENING	960		1150				1150	1200



## DATA SHEET

# COMPONENT CABINET - TYPE 1600

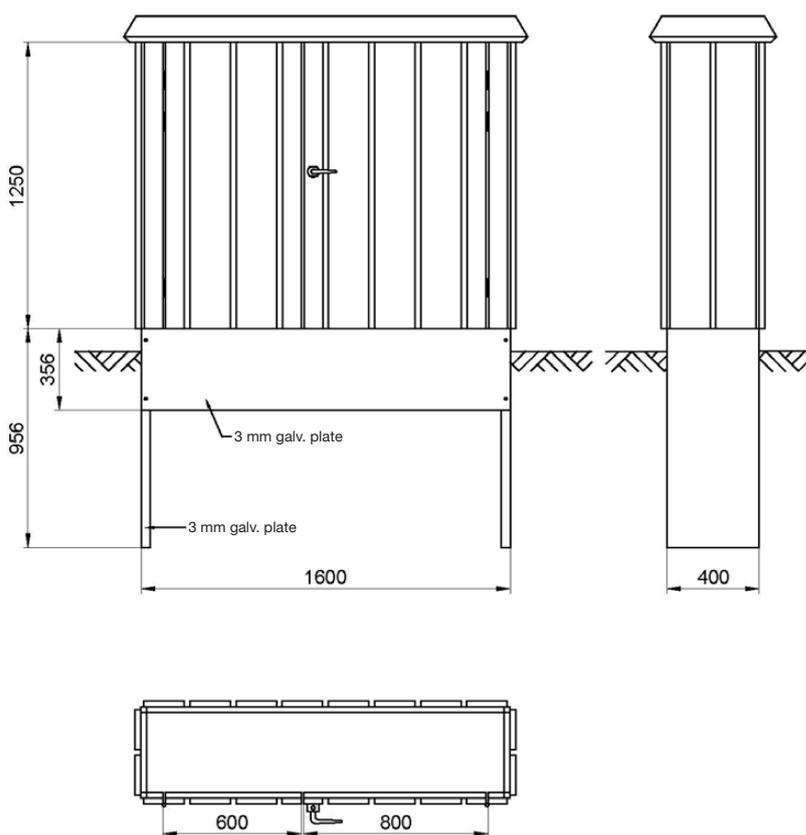

### DESCRIPTION

Component cabinets are constructed on a frame of square tubes which are then clad with profiled Aluzinc sheets. The component cabinet is supplied ready to use with a padlock and can be customized according to the client's wishes.

### MATERIALS

Frame: Sq.tube frame 25x25x2 mm.  
 Sides: Aluzinc sheet, 1.25 mm.  
 Roof: Aluzinc sheet, 1.25 mm.  
 Foundation: Plate 3 mm.  
 FU moisture barrier: Plate 3 mm.

### COLOUR

Is supplied painted, using textured URKI-TEXT paint (standard) in the color of your choice from the RAL color chart.

### STANDARD SURFACE TREATMENT

Frame, foundation and FU protection: Hot dip galvanized zinc as per DS/ EN 1461  
 Sides and roof: Aluzinc sheets as per DS/EN 10364  
 Exterior cabinet paint: C4-H as per DS/EN 12944.

### OPTIONS

Painting of cabinet exterior: C5-H as per DS/EN 12944  
 Foundation painted to IM3 as per DS/EN12944.


### COMPONENT CABINET - TYPE 1600

TYPE	ITEM NO.	DESCRIPTION	EXTERIOR DIMENSIONS MM			INTERIOR DIMENSIONS MM			ASSEMBLY PLATE	
			W	D	H	W	D	H	W	H
1600	64120010-1	CABINET	1650	450	1400	1550	325	1200		
	64190416	FOUNDATION	1595	395						
		DOOR OPENING	1360		1150				1550	1200



## DATA SHEET

# COMPONENT CABINET - TYPE 2000

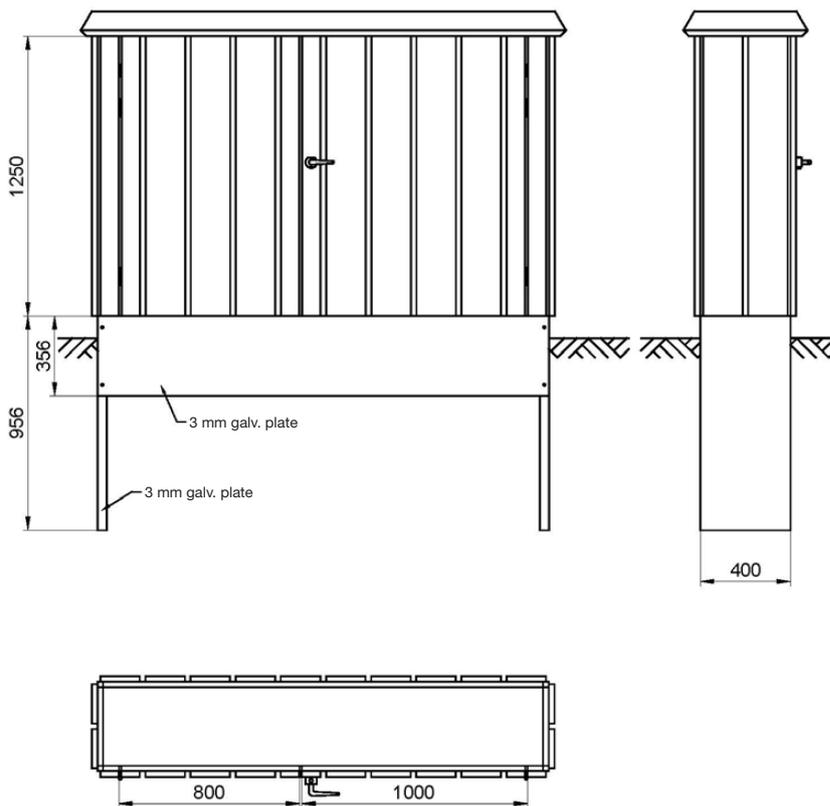

### DESCRIPTION

Component cabinets are constructed on a frame of square tubes which are then clad with profiled Aluzinc sheets. The component cabinet is supplied ready to use with a padlock and can be customized according to the client's wishes.

### MATERIALS

Frame: Sq.tube frame 25x25x2 mm.  
 Sides: Aluzinc sheet, 1.25 mm.  
 Roof: Aluzinc sheet, 1.25 mm.  
 Foundation: Plate 3 mm.  
 FU moisture barrier: Plate 3 mm.

### COLOUR

Is supplied painted, using textured URKI-TEXT paint (standard) in the color of your choice from the RAL color chart.

### STANDARD SURFACE TREATMENT

Frame, foundation and FU protection: Hot dip galvanized zinc as per DS/ EN 1461  
 Sides and roof: Aluzinc sheets as per DS/EN 10364  
 Exterior cabinet paint: C4-H as per DS/EN 12944.

### OPTIONS

Painting of cabinet exterior: C5-H as per DS/EN 12944  
 Foundation painted to IM3 as per DS/EN12944.

### COMPONENT CABINET - TYPE 2000

TYPE	ITEM NO.	DESCRIPTION	EXTERIOR DIMENSIONS MM			INTERIOR DIMENSIONS MM			ASSEMBLY PLATE	
			W	D	H	W	D	H	W	H
2000	64120070-1	CABINET	2050	450	1400	1950	325	1200		
	64190420	FOUNDATION	1995	395						
		DOOR OPENING	1760		1150				1950	1200